

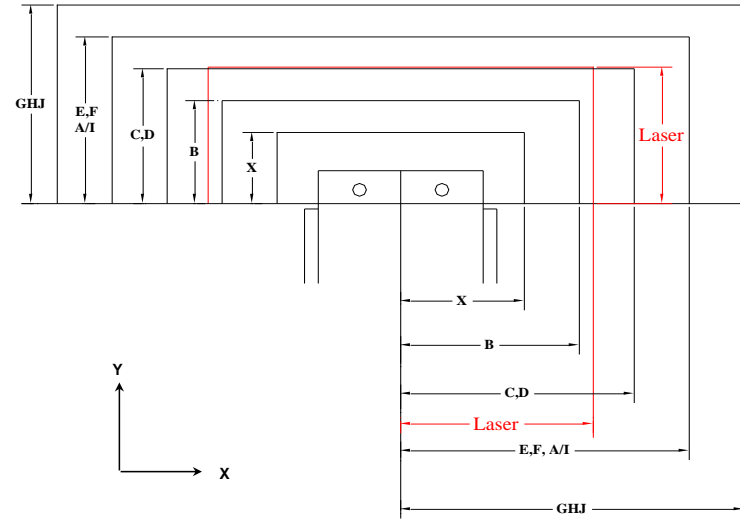


Max Station Range Act. Station Range	X	B	C	D	EF		GHJ			VariTool Auto Index	
					E	F	G	H (114)	J (114)	A/I, V/T Ready	VARITOOL
No. of Stations	10	28	6	4	1	1	1	1	0	2	0
Round/Obround	0.500" & Under	1.000" & Under	Over 1.000" to 1.500"	Over 1.500" to 2.00"	Over 2.000" to 2.500"	Over 2.500" to 3.000"	Over 3.000" to 3.500"	Over 3.500" to 4.125"	Over 4.125" to 4.750"	3.00" Max. Diameter	12 Station 1/2" Maximum Diameter
Square	N/A	0.625" & Under	Over 0.625" to 0.875"	Over .875" to 1.250"	Over 1.250" to 1.625"	Over 1.625" to 2.00"	Over 2.000" to 2.250"	Over 2.250" to 2.750"	Over 2.750" to 3.125"		
Rectangle	N/A	1.000" Max Across Corners	1.500" Max Across Corners	1.750" Max Across Corners	2.250" Max Across Corners	2.625" Max Across Corners	3.125" Max Across Corners	3.875" Max Across Corners	4.437" Max Across Corners		
Punch Holder O.D.	1.692"	2.250"	3.125"	3.375"	4.562"	4.562"	5.938"	5.938"	5.938"	4.172"	4.172"
Die Holder I.D.	1.562"	1.562"	2.250"	2.750"	3.500"	4.000"	4.500"	5.250"	6.000"	4.000"	N/A

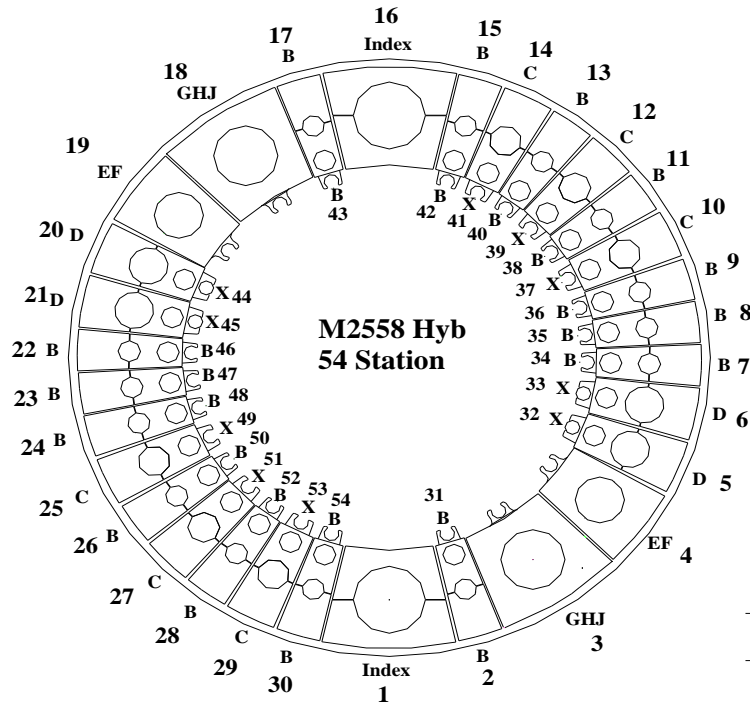

Safety Zones:	X	Y	(US) Tonnage Limits:
X	+/-2.480"	1.299"	Machine: 27.5
B	+/-2.756"	1.575"	Auto Index: 16.5
CD	+/-3.307"	2.126"	Vari-Tool: 5
EF	+/-3.898"	2.717"	
GHJ	+/-4.606"	3.425"	
Laser	+/-3.504"	2.677"	

Cell Ready add +/- .563"

Load Position: X98.425 Y72.047 M30

Travel Range:	Minimum	Maximum
X	-0.984	99.409
Y	0.000	74.999
(Inner track)		
(Outer track)	Y -2.756	72.244

Throat Depth: 63.779" (1620mm)

Laser Location: 11.811" (300mm)
 Small parts chute: X21.654 Y9.251
 Large parts chute: X21.654 Y23.622
 Conveyor belt width: 20.63

